

Browser Control for MA-725F/MM-700F

1. Browser Control Outline

1.1. General Description

The browser Control feature allows password protected control of source, volume, individual selection of which zones are controlled by the browser, and changes to priority settings. Labeling, network settings and password changes on either the MA-725F or MM-700F models are also available. Internet Explorer, Google Chrome, and Firefox are supported, as well as Smartphones (iOS or Android devices) using those browsers.

Note: While the browser control is active, the front panel and any WP-700 AM controllers are disabled.
Hierarchy is browser control > WP-700 AM wall controller > front panel.

1.2. System Requirements

- Any PC or MAC with a web browser. Any iOS or Android smart phone with a web browser.
- Firmware updates require a PC running Windows 7 or higher.

2. Browser Operation

Browser control requires firmware version 2.05 or later.

2.1. Browser Admin Access Page


Point your browser to the mixer's default IP address of 192.168.14.1 (make sure your computer's IP address is in the same range as the mixer 192.168.14.xxx). The default Admin Username is "admin". The default Admin Password is "admin".



NOTE: IF YOU CANNOT CONNECT TO THE DEFAULT IP ADDRESS, YOU MAY NEED TO UPDATE THE SYSTEM FIRMWARE. REFER TO SECTION 3 INSTRUCTIONS ON PAGES 6 THROUGH 8 OF THIS DOCUMENT.


2.2. Admin Operation

This is the mixer's landing page for the URL. It provides control of source selection and volume.

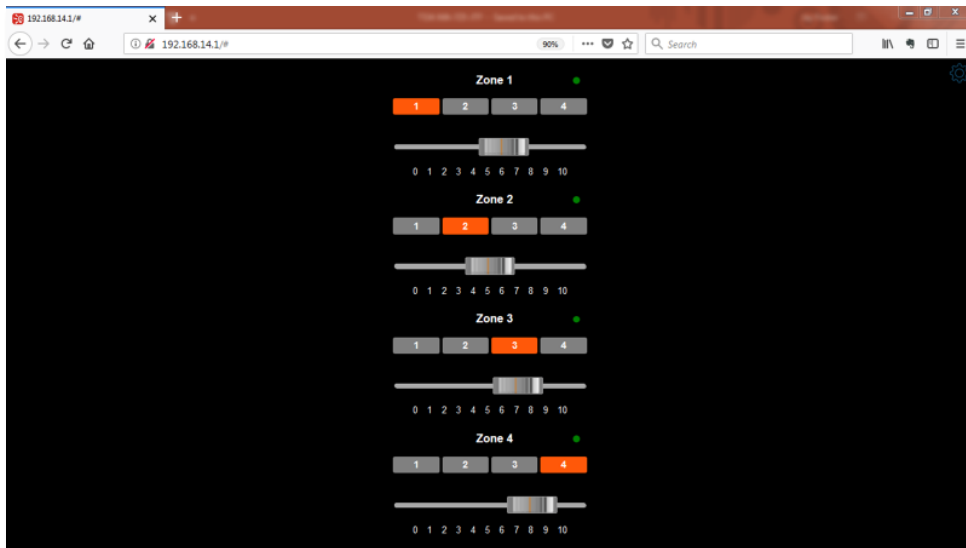

To get to the options menu, click on the Gear icon at the top right of the screen as indicated below. The icon itself is a dark blue color.

Menu Screen (Early Version Example)

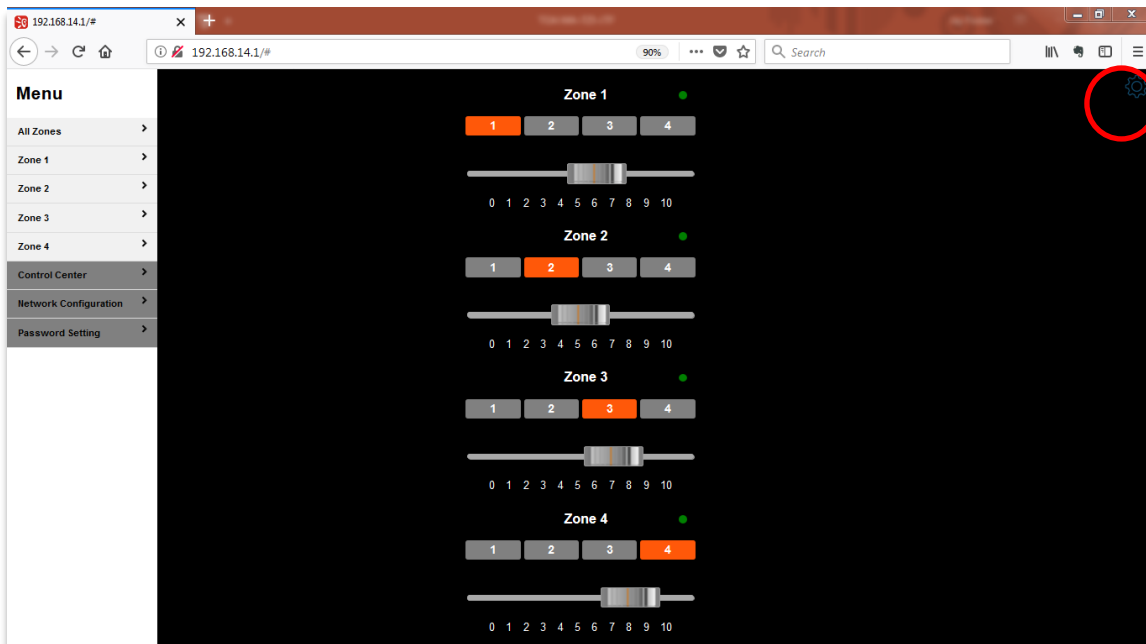


- All Zone:
View all zones on one page (as shown above)
- Zone: 1 – 4
View selected zone on its own page

2.3. Control Center


Allows the user to turn an individual channel’s Browser Control On or Off as indicated when it turns green. When viewing from the Zone screen, the green “LED” indicates Browser Control is On. Grey indicates Browser Control is Off.

Control Center Screen (Newer Version Example)

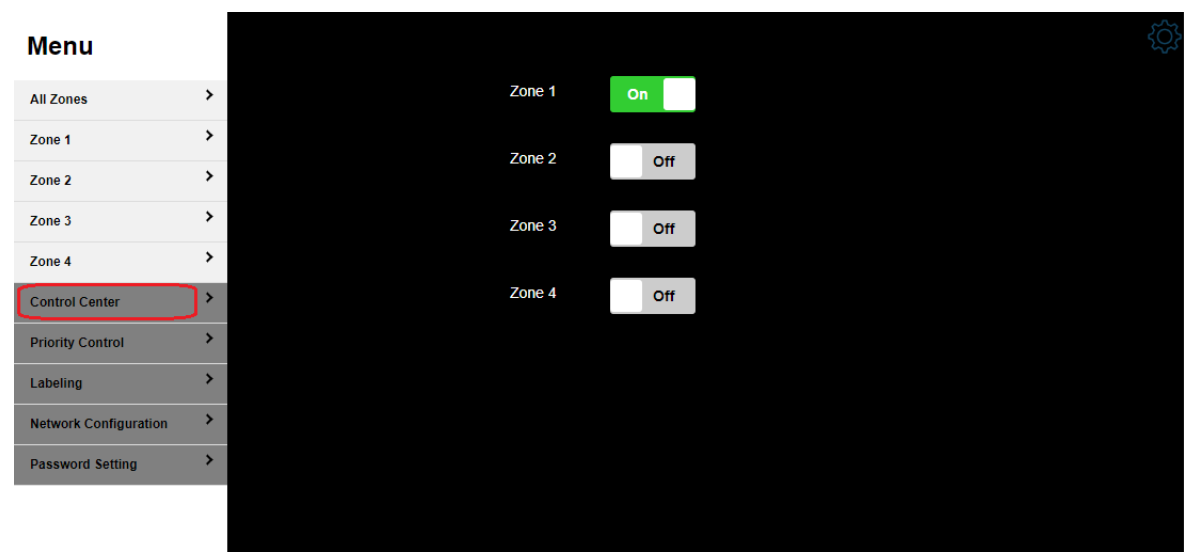

2.4. Smart Control DIP Switch Priority Override (New Feature)

This allows the user to deactivate a back panel priority setting. You must be logged in as an Administrator to access this function. It allows the user to remove a zone from a general page mute signal. When the Browser Control is disabled or turned off, the back panel DIP switch priority settings will resume.

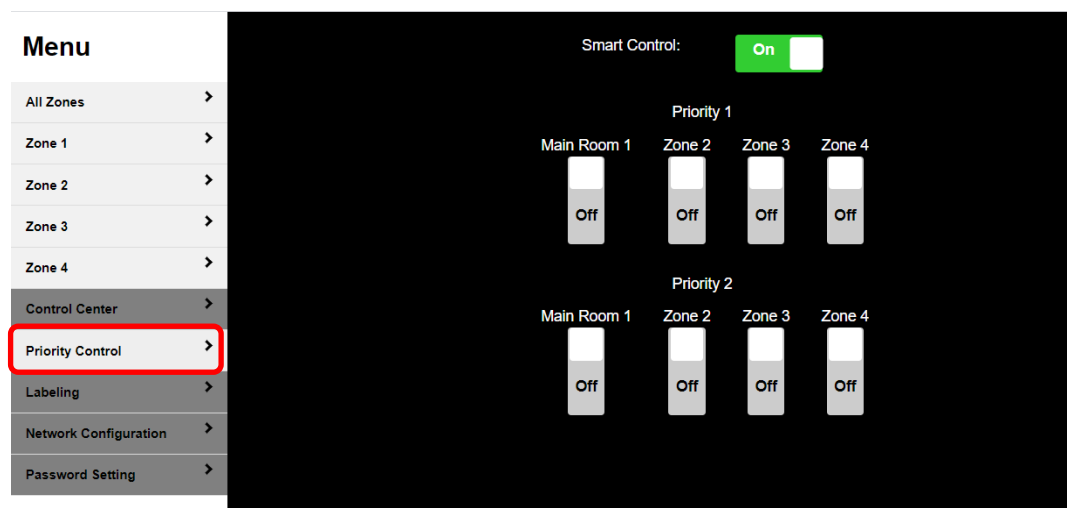


CAUTION: DO NOT USE this function if an emergency warning signal is used as an input to the unit.

2.5. Source Labeling

Browser access allows for Input and Zone labeling for ease of use via browser remote control. Up to 30 characters may be used. You must be logged in as an Administrator to access this function. (Menu on left omitted for clarity)

Labeling Configuration Screen

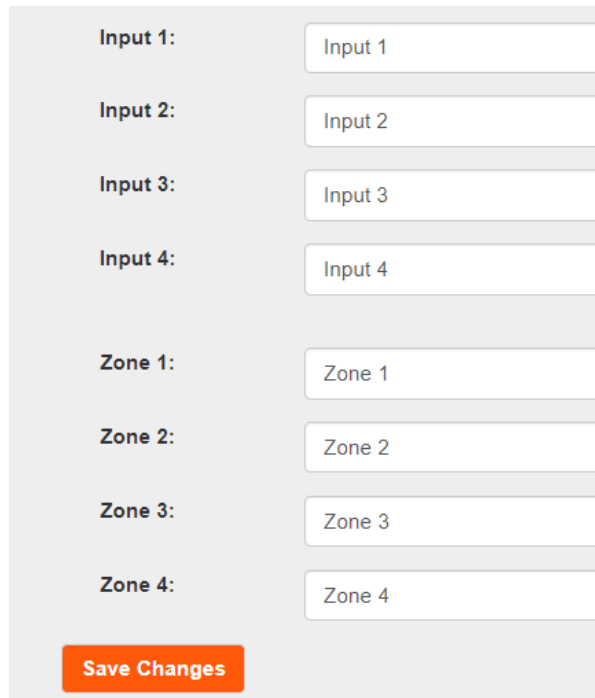

The Labeling Configuration Screen is a web interface for configuring source labels. It features a light gray background with a vertical list of configuration items. Each item consists of a label (e.g., 'Input 1:', 'Zone 1:') followed by a white text input field with a thin gray border. The items are: Input 1, Input 2, Input 3, Input 4, Zone 1, Zone 2, Zone 3, and Zone 4. At the bottom left, there is an orange rectangular button with the text 'Save Changes' in white.


Input 1:	Input 1
Input 2:	Input 2
Input 3:	Input 3
Input 4:	Input 4
Zone 1:	Zone 1
Zone 2:	Zone 2
Zone 3:	Zone 3
Zone 4:	Zone 4

Save Changes

2.6. Network Configuration

View or change the unit's IP address and to view the current parameters and firmware version. You must be logged in as an Administrator to access this function. (Menu on left omitted for clarity)

Network Configuration Screen

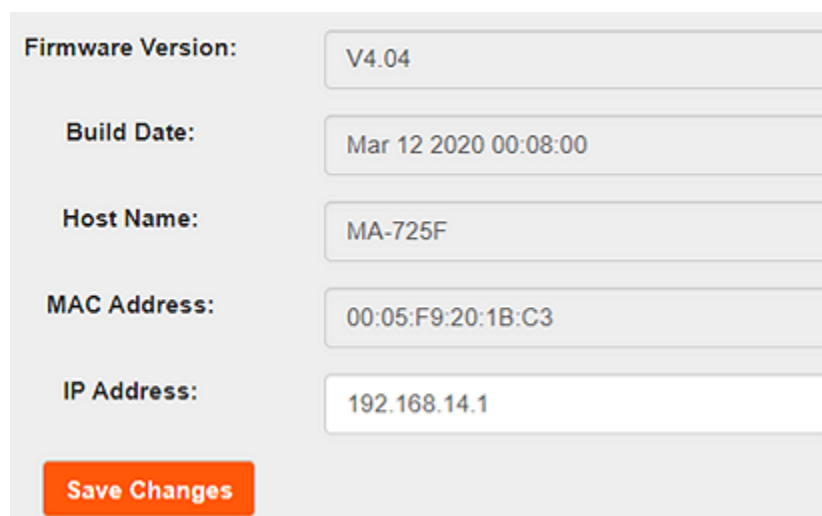

The Network Configuration Screen is a web interface for viewing and configuring network parameters. It has a light gray background. The parameters are listed on the left, each followed by a white text input field with a thin gray border. The parameters and their current values are: Firmware Version (V4.04), Build Date (Mar 12 2020 00:08:00), Host Name (MA-725F), MAC Address (00:05:F9:20:1B:C3), and IP Address (192.168.14.1). At the bottom left, there is an orange rectangular button with the text 'Save Changes' in white.

Firmware Version:	V4.04
Build Date:	Mar 12 2020 00:08:00
Host Name:	MA-725F
MAC Address:	00:05:F9:20:1B:C3
IP Address:	192.168.14.1

Save Changes

2.7. Password Setting

Up to 6 digits may be used (Letters and numbers only, no special characters). You must be logged in as an Administrator to access this function. (Menu on left omitted for clarity)

Password Setting Screen

The screenshot displays a web interface for password management, divided into two main sections: ADMIN ACCOUNT and USER ACCOUNT. Each section contains three input fields for password entry and a 'Save Changes' button.

ADMIN ACCOUNT

Current Password:

New Password:

Confirm Password:

USER ACCOUNT

Current Password:


New Password:

Confirm Password:

3. MA-725F/MM-700F Maintenance and Special Functions

3.1 How to Update MA-725F/MM-700F Firmware


- If your PC has an auto negotiate NIC card, connect an Ethernet patch cable (straight) from your Windows PC to the MA-725F/MM-700F and turn the MA-725F/MM-700F Off (Otherwise use a cross cable for this procedure).
- Push and hold the Input 1 select button on Zone 1.

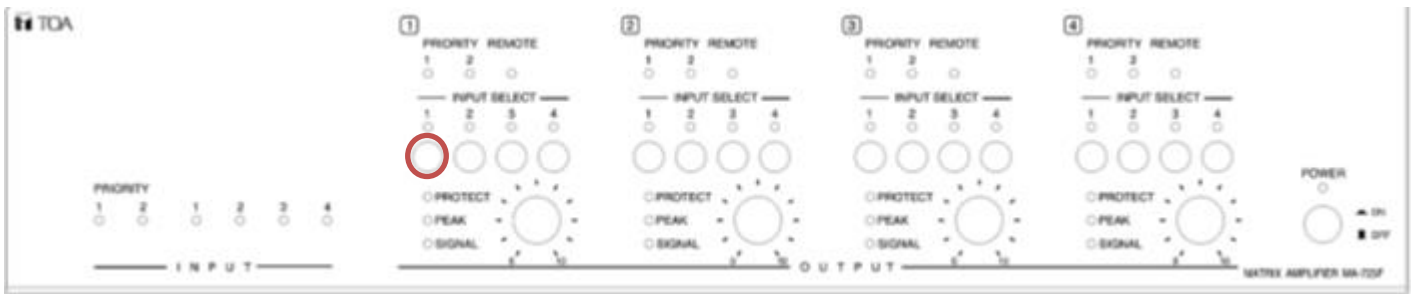

- Power the MA-725F/MM-700F On. When the Power LED starts flashing, release the Input 1 select button.
- Locate the Firmware Upgrade Tool program on your PC. Double click on this executable file to run the program.


Name	Date modified	Type	Size
 MA-700_725 Firmware Upgrade Tool	9/8/2016 9:26 AM	Application	384 KB

- Press the “Connect” button to start communication with the MA-725F/MM-700F and confirm the device is connected.

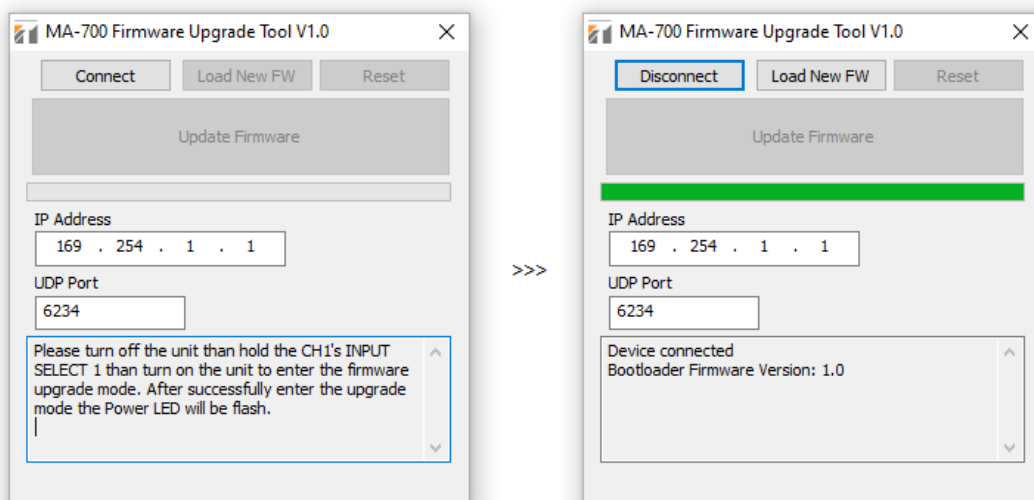


- Press the “Load New FW” button and select the new firmware file to load from your PC and confirm it loaded successfully.


Name	Date modified	Type	Size
 20200312 MA-725F_BGM_APP_V4.04.hex	3/12/2020 2:36 PM	HEX File	1,060 KB

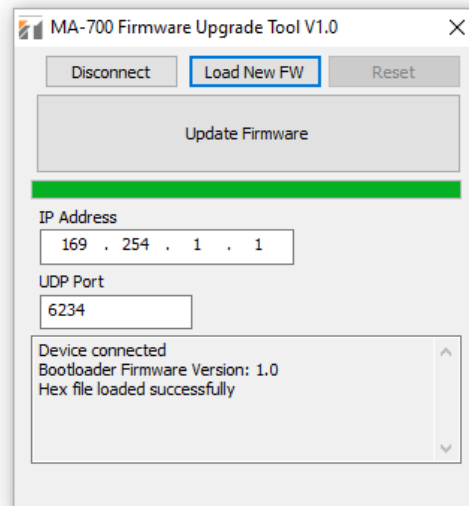

- Press “Upgrade Firmware” button to start the firmware update.
- If the update is successful, your screen will show as follows.

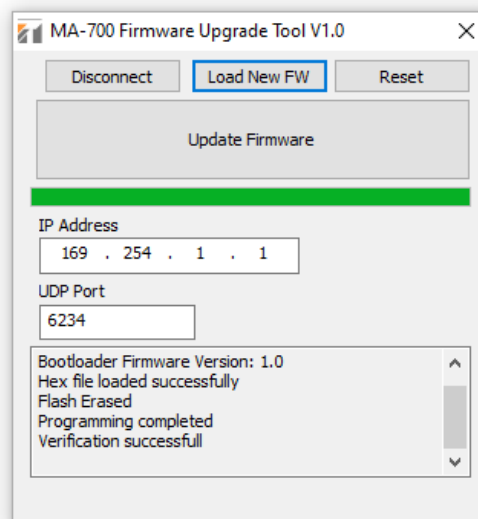


- Press the reset button to initialize the unit.

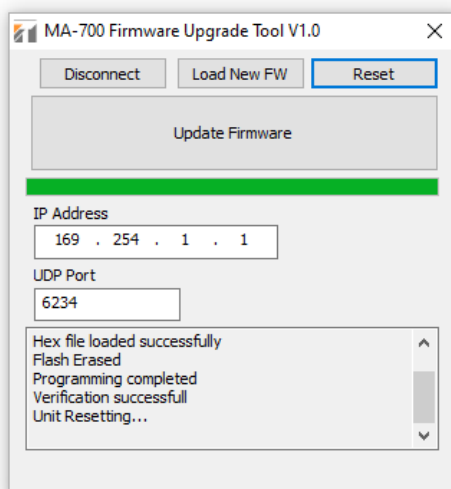

- Turn the MA-725F/MM-700F Off after 15 seconds.

3.2 IP Address, Username and Password Factory Default Reset Procedure


- Push and hold Input Select Buttons 2 and 3 under Zone 1 and turn the MA-725F/MM-700F On.
- Release the buttons when the power light blinks after a few seconds.

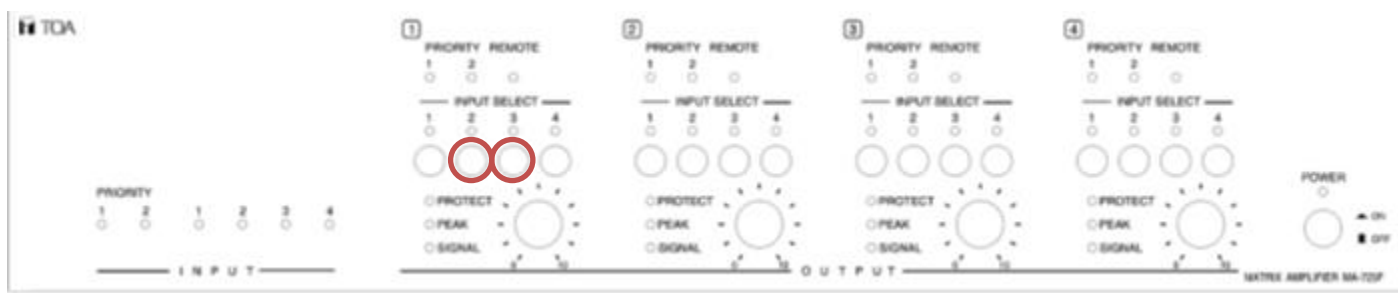

- The default IP address of the unit has now been reset to the factory setting of 192.168.14.1 and the Admin Username and Password have both been reset to “admin”. The User Username and Password have both been reset to “user”.
- Use this factory default IP address to reconnect to the MA-725F/MM-700F.

3.3 Browser Control Release Without Browser Access


To return control to the WP-700 AM wall controllers or front panel control, hold down Input Select buttons 1-4 on Zone 1 for more than 4 seconds.

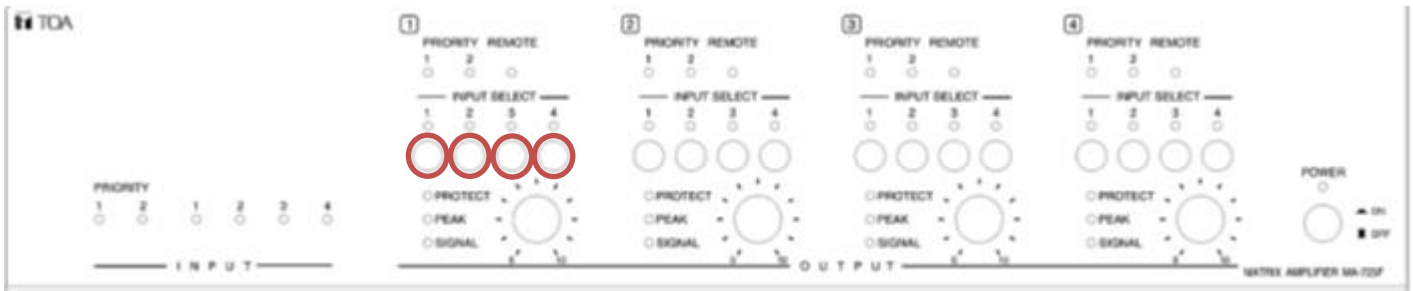

4. Reference Notes


4.1 Admin Access Menu View

Username: admin
Password: admin

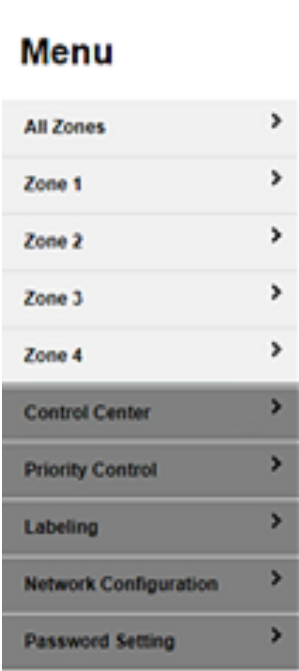

4.2 User Access Menu View

Username: user
Password: user

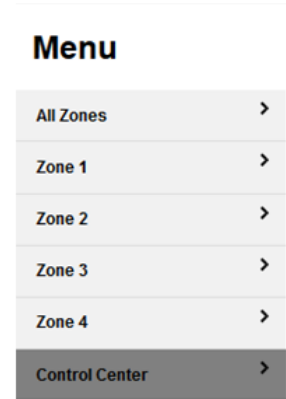

4.3 API Control

This version of firmware supports API control. API command controls are available under separate cover.