

DESCRIPTION


The DT-930 radio tuner is designed for exclusive use with TOA's 900 series amplifiers. It is capable of receiving FM stereo broadcast and storing a total of 40 FM and AM stations. With the use of an optional rack mounting bracket, it can be mounted in an EIA Standard equipment rack (1 unit size).

SPECIFICATIONS


*0 dB = 1 V

| | |
|-----------------------|--|
| Power Source | 120 V AC, 60 Hz (supplied from the AC adapter (accessory)) |
| Power Consumption | 180 mA (when AC adapter (accessory) is used) |
| Receiving Frequency | FM: 87.9 – 107.9 MHz (200 kHz step) AM: 520 – 1710 kHz (10 kHz step) |
| Antenna Input | FM: 300 Ω (balanced), 75 Ω (unbalanced) AM: Loop antenna (balanced), external antenna (unbalanced) |
| Audio Output | Stereo: -15 dB*, 10 kΩ, unbalanced, RCA jack Monaural: -15 dB*, 10 kΩ, unbalanced, M3 screw terminal, distance between barriers: 6.4 mm, RCA jack |
| Channels of Memory | 40 channels in total for AM and FM broadcasts |
| Operating Temperature | 0 °C to +40 °C |
| Finish | Panel: Aluminum (hair-line finish), black Case: Pre-coated steel plate, black |
| Dimensions | 420 (W) × 53 (H) × 295 (D) mm |
| Weight | 2.8 kg |
| Accessory | AC adapter ---1, RCA stereo cord (1 m) ---1, AM loop antenna (For indoor use only, 135 × 125 mm, leadwire: 1.2 m) ---1, FM dipole antenna (For indoor use only, element length: 1.5 m, feeder: 1.8 m) ---1 |
| Option | Rack mounting bracket: MB-15B |


APPEARANCE

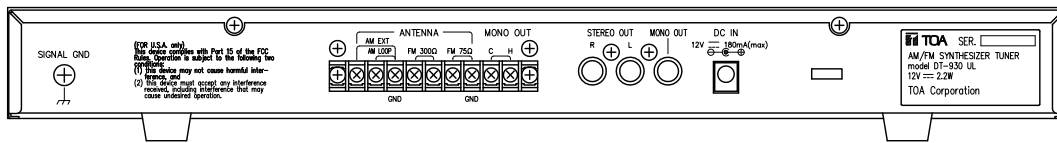

Rear View

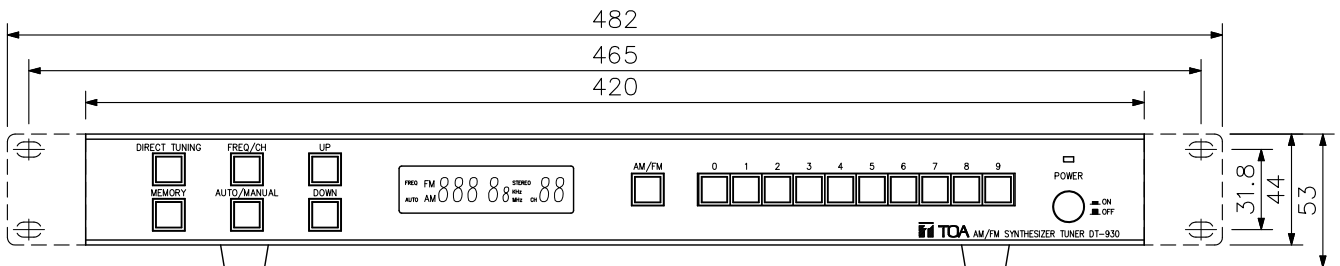

Front View

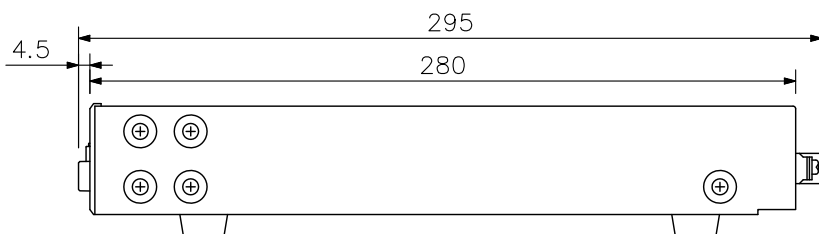

Side View

UNIT: mm SCALE: 1/3