



# PUBLIC ADDRESS SPEAKERS



***An innovative balance of form and function,  
plus superbly easy installation.***

# A completely novel design that is a true combination of form and function.

TOA engineers have worked long and hard to create round speakers with an optimal balance of design and performance.

Pendant and projection speakers are inspired by the finest lighting fixtures, for a perfect harmony with architecture and decor.

Repaintable speakers allow you to customize the color any way you like.

High sound pressure level of up to 30W input ensures excellent sound reproduction in high-ceiling and wall-mount applications.



**PJ-64/304 Projection Speaker**  
Supplied brackets ensure flexible speaker direction changes.



**PE-64/304 Pendant Speaker**  
Sturdy cable, extendable up to 5 meters, enables speaker mounting even from a high ceiling.

# Uncomplicated and easy-to-use fittings cut installation time to half that of conventional models.

Simple and easy installation, thanks to TOA's new proprietary SUS spring-based installation method.

All speakers employ the same simple and easy installation method, unaffected by their diameter size.

Greater variety of ceiling flush-mount speaker diameters and functions, for application flexibility that suits every situation.

Finely crafted design with thin panel that does not detract from venue architecture or interior decor.



~~PC-2869/2852~~ Not Available in Canada



~~PC-2369~~  
Not Available in Canada



PC-1869



# Choice of horizontal or vertical installation for a more exact match with the venue.

Innovative BS-634 and BS-680F/FC design is based on the Golden Ratio (1: 1.618), a proportion widely used in Western architecture that is especially pleasing to the eye.

Surface stains easily removable from metal punching net.



**BS-1034S**

**BS-634/634T/1034**

Unparalleled ease and simplicity of installation, with simultaneous wiring and mounting capability, then just putting in the speaker unit.

**BS-634/634T**

**Not Available in Canada**



**BS-680F/FC**

Strong, all-metal body construction makes this an ideal speaker for emergency broadcasting applications.

**BS-680F -Not Available in Canada**



~~**BS-633A/AT**~~

Six watts of output power is double that of 3W conventional speakers. Excellent cost-performance ratio.

**Not Available in Canada**



**BS-678**


Suitable for a wide range of applications, and with an excellent cost-performance ratio. Quick and easy installation.



# Speakers with fast installation, standout performance and a design that fits in beautifully.

TOA public address speakers come in a wide line-up that gives you just the speaker you need, whether your choice is based on design, cost or installation requirements. TOA has developed new speaker component parts that are standardized to ensure quality sound reproduction from all speaker models, in every application.

Comprehensive TOA efforts in creating speaker designs that harmonize with the venue's architecture and décor have led to speakers that emphasize unobtrusive mounting. In addition, TOA's unceasing pursuit of fitting design and engineering breakthroughs has resulted in the elimination of a considerable amount of wasted time during installation.

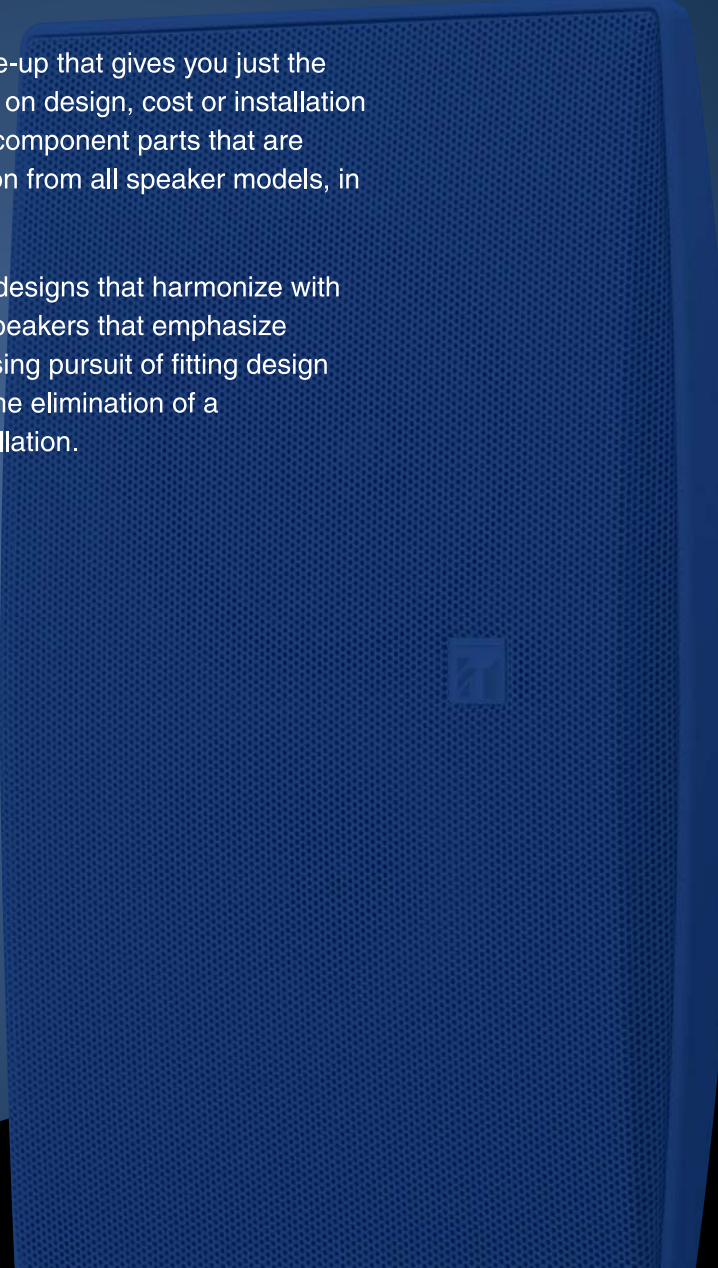

## SPECIFICATIONS Ceiling Mount Speakers

Model No.	PC-1869	PC-2369 <i>Not Available in Canada</i>	PC-2869 <i>Not Available in Canada</i>	PC-2852 <i>Not Available in Canada</i>
Speaker Component	5" (12cm) cone-type	6" (16cm) double cone-type	8" (20cm) double cone-type	8" (20cm) Coaxial 2-way cone-type
Rated Input	100V LINE: 6W, 70V LINE: 3W			100V LINE: 15W, 70V LINE: 15W
Impedance	100V LINE: 1.7 k $\Omega$ (6W), 3.3 k $\Omega$ (3W), 6.7 k $\Omega$ (1.5W), 13 k $\Omega$ (0.8W) 70V LINE: 1.7 k $\Omega$ (3W), 3.3k $\Omega$ (1.5W), 6.7 k $\Omega$ (0.8W), 13 k $\Omega$ (0.4W)			100V LINE: 670 $\Omega$ (15W), 1k $\Omega$ (10W), 2k $\Omega$ (5W), 3.3k $\Omega$ (3W) 70V LINE: 330 $\Omega$ (15W), 670 $\Omega$ (7.5W), 1k $\Omega$ (5W), 2k $\Omega$ (2.5W), 3.3k $\Omega$ (1.5W)
Sound Pressure Level (1m/1W)	90 dB	93dB	94dB	96dB
Frequency Response	55 – 18,000 Hz	45 – 20,000 Hz	40 – 20,000 Hz	45 – 20,000 Hz
Input Terminal	Push-in terminal			
Finish	Baffle: Steel plate, off-white, paint/Grille: Surface-treated steel plate net, off-white, paint			
Dimensions	$\phi 180 \times 72$ (D)mm ( $\phi 7.09" \times 2.83"$ )	$\phi 230 \times 79$ (D)mm ( $\phi 9.06" \times 3.11"$ )	$\phi 280 \times 92$ (D)mm ( $\phi 11.02" \times 3.62"$ )	

## Wall Mount Speakers


Model No.	BS-633A <i>Not Available in Canada</i>	BS-633AT <i>Not Available in Canada</i>	BS-634 <i>Not Available in Canada</i>	BS-634T <i>Not Available in Canada</i>	BS-1034	BS-1034S
Speaker Component	5" (12cm) cone-type		5" (12cm) cone-type		5" (12cm) cone-type + balanced dome tweeter	
Rated Input	100V LINE: 6W, 70V LINE: 3W		100V LINE: 6W, 70V LINE: 3W		100V LINE: 10W, 70V LINE: 10W	
Impedance	100V LINE: 1.7 k $\Omega$ (6W), 3.3 k $\Omega$ (3W), 10 k $\Omega$ (1W) 70V LINE: 1.7 k $\Omega$ (3W), 3.3 k $\Omega$ (1.5W), 10 k $\Omega$ (0.5W)	100V LINE: 1.7 k $\Omega$ (6W), 3.3 k $\Omega$ (3W) 70V LINE: 1.7 k $\Omega$ (3W), 3.3 k $\Omega$ (1.5W)	100V LINE: 1.7 k $\Omega$ (6W), 3.3 k $\Omega$ (3W) 70V LINE: 1.7 k $\Omega$ (3W), 3.3 k $\Omega$ (1.5W)	100V LINE: 1.7 k $\Omega$ (6W) 70V LINE: 1.7k $\Omega$ (3W)	100V LINE: 1k $\Omega$ (10W), 2k $\Omega$ (5W), 3.3k $\Omega$ (3W), 10k $\Omega$ (1W) 70V LINE: 500 $\Omega$ (10W), 1k $\Omega$ (5W), 2k $\Omega$ (2.5W), 3.3k $\Omega$ (1.5W) 10k $\Omega$ (0.5W)	
Sound Pressure Level (1m/1W)	91 dB		90 dB			
Frequency Response	120 – 15,000Hz		120 – 18,000Hz		120 – 20,000Hz	
Input Terminal	Push-in terminal		M4 screw terminal			
Attenuation	—	3W: OFF, 1(-12dB), 2(-6dB), 3(0dB) 6W: OFF, 1(-13dB), 2(-7dB), 3(0dB)	—	OFF, 1(-12dB), 2(-6dB), 3(0dB)	—	
Finish	Case: ABS resin, Off-white Rear board: Hard board		Enclosure: HIPS resin, off-white Grille: Surface-treated steel plate net, off-white, paint		Enclosure: HIPS resin, off-white Grille: Steel plate net, off-white, paint	Enclosure: HIPS resin, silver, paint Grille: Steel plate net, silver, paint
Dimensions	173(W) $\times$ 195(H) $\times$ 101(D)mm (6.81" $\times$ 7.68" $\times$ 3.98")		210(W) $\times$ 330(H) $\times$ 80(D)mm (8.27" $\times$ 12.99" $\times$ 3.15")			

Model No.	BS-678	BS-680F <i>Not Available in Canada</i>	BS-680FC
Speaker Component	6" (16cm) double cone-type	6" (16cm) double cone-type	
Rated Input	100V LINE: 6W, 70V LINE: 3W	100V LINE: 6W, 70V LINE: 3W	
Impedance	100V LINE: 1.7 k $\Omega$ (6W), 3.3k $\Omega$ (3W), 6.7 k $\Omega$ (1.5W), 13k $\Omega$ (0.8W) 70V LINE: 1.7 k $\Omega$ (3W), 3.3 k $\Omega$ (1.5W), 6.7 k $\Omega$ (0.8W), 13 k $\Omega$ (0.4W)	100V LINE: 1.7 k $\Omega$ (6W), 3.3 k $\Omega$ (3W), 6.7 k $\Omega$ (1.5W), 13 k $\Omega$ (0.8W) 70V LINE: 1.7 k $\Omega$ (3W), 3.3 k $\Omega$ (1.5W), 6.7 k $\Omega$ (0.8W), 13 k $\Omega$ (0.4W)	
Sound Pressure Level (1m/1W)	94 dB	94 dB	
Frequency Response	150 – 20,000 Hz	150 – 20,000 Hz	
Input Terminal	Push-in terminal	Push-in terminal	Screw connector (ceramic terminal)
Finish	Baffle: HIPS resin, off-white Cabinet: Wood, off-white Grille: Surface-treated steel plate net, off-white	Baffle: Steel plate, off-white Cabinet: Steel plate, off-white Grille: Surface-treated steel plate net, off-white	
Dimensions	250(W) $\times$ 190(H) $\times$ 110(D)mm (9.84" $\times$ 7.48" $\times$ 4.33")	310(W) $\times$ 190(H) $\times$ 87.2(D)mm (12.20" $\times$ 7.48" $\times$ 3.43")	

## Pendant Speakers

Model No.	PE-64	PE-304	PJ-64	PJ-304
Speaker Component	5" (12cm) cone-type	5" (12cm) cone-type + balanced dome tweeter	5" (12cm) cone-type	5" (12cm) cone-type + balanced dome tweeter
Rated Input	100V LINE: 6W, 70V LINE: 3W	100V LINE: 30W, 70V LINE: 30W LOW IMP: 8 $\Omega$	100V LINE: 6W, 70V LINE: 3W	100V LINE: 30W, 70V LINE: 30W LOW IMP: 8 $\Omega$
Impedance	100V LINE: 1.7k $\Omega$ (6W), 3.3k $\Omega$ (3W), 10 k $\Omega$ (1W) 70V LINE: 1.7k $\Omega$ (3W), 3.3k $\Omega$ (1.5W), 10 k $\Omega$ (0.5W)	100V LINE: 330 $\Omega$ (30W), 500 $\Omega$ (20W), 670 $\Omega$ (15W), 1k $\Omega$ (10W), 2k $\Omega$ (5W) 70V LINE: 170 $\Omega$ (30W), 250 $\Omega$ (20W), 330 $\Omega$ (15W), 500 $\Omega$ (10W), 1 k $\Omega$ (5W) LOW IMP: 8 $\Omega$ (30W)	100V LINE: 1.7k $\Omega$ (6W), 3.3k $\Omega$ (3W), 10 k $\Omega$ (1W) 70V LINE: 1.7k $\Omega$ (3W), 3.3k $\Omega$ (1.5W), 10 k $\Omega$ (0.5W)	100V LINE: 330 $\Omega$ (30W), 500 $\Omega$ (20W) 670 $\Omega$ (15W), 1k $\Omega$ (10W), 2k $\Omega$ (5W), 70V LINE: 170 $\Omega$ (30W), 250 $\Omega$ (20W), 330 $\Omega$ (15W), 500 $\Omega$ (10W), 1k $\Omega$ (5W) LOW IMP: 8 $\Omega$ (30W)
Sound Pressure Level	90 dB	91dB	90 dB	91dB
Frequency Response	100 – 18,000 Hz	70 – 20,000 Hz	100 – 18,000 Hz	70 – 20,000 Hz
Input Terminal	Push-in terminal		—	
Finish	Enclosure: HIPS resin, off-white/Grille: Surface-treated steel plate net, off-white, paint		Enclosure: HIPS resin, off-white/Grille: Surface-treated steel plate net, off-white, paint	
Dimensions	$\phi 186 \times 251$ (H) mm ( $\phi 7.32" \times 9.88"$ ) (unit only)		$\phi 186 \times 369$ (H) mm ( $\phi 7.32" \times 14.33"$ )	

## Projection Speakers



Human society with  
Sound & Communication

## TOA Canada Corporation

6150 Kennedy Road, Unit 3

Mississauga, ON, L5T 2J4

Tel: 1-800-263-7639 or 905-564-3570

Fax: 1-800-463-3569 or 905-564-3569

sales@toacanada.com • www.TOACanada.com

Specifications are subject to change without notice.  
833-52-379-6A u