

# VIDEO DISTRIBUTOR

## C-VD6



## DESCRIPTION

---

The TOA's C-VD6 video distributor adds versatility to CCTV operation by distributing one video signal to six video outputs, or two different video signals each to three outputs. The unit is compact and lightweight and can be mounted on a standard rack cabinet with an optional bracket.

## FEATURES


---

- C-DV6 is designed for both B/W and color system.
- Distributes one video input to six outputs, or two different video inputs each to three outputs.
- Can be mounted on a rack cabinet with an optional bracket (MB-15B-BK and MB-15B-J).
- Compact design.


## SPECIFICATIONS

	C-VD6
<b>Power Requirements</b>	120V AC ("L" version) 230V AC ("HH" and "UK" version), 50/60Hz
<b>Power Consumption</b>	4.5W (5.4VA)
<b>Video Input</b>	1V (p-p) 75Ω (BNC) 2 inputs
<b>Video Output</b>	1V (p-p) 75Ω (BNC) 6 outputs
<b>Distribution</b>	One input to 6 outputs or 2 different inputs to each of 3 outputs (switchable)
<b>Ambient Temperature</b>	-10°C to +50°C
<b>Finish</b>	Panel: Semi-glazed melamine baked paint (black)
<b>Dimensions</b>	210 (W) x 46 (H) x 296 (D) mm (8.27 (W) x 1.81 (H) x 11.65 (D) inches)
<b>Weight</b>	1.8 kg (4.0 lb.)
<b>Option</b>	Rack mounting bracket: MB-15B-J for two units MB-15B-BK for one unit

## BASIC CONNECTIONS

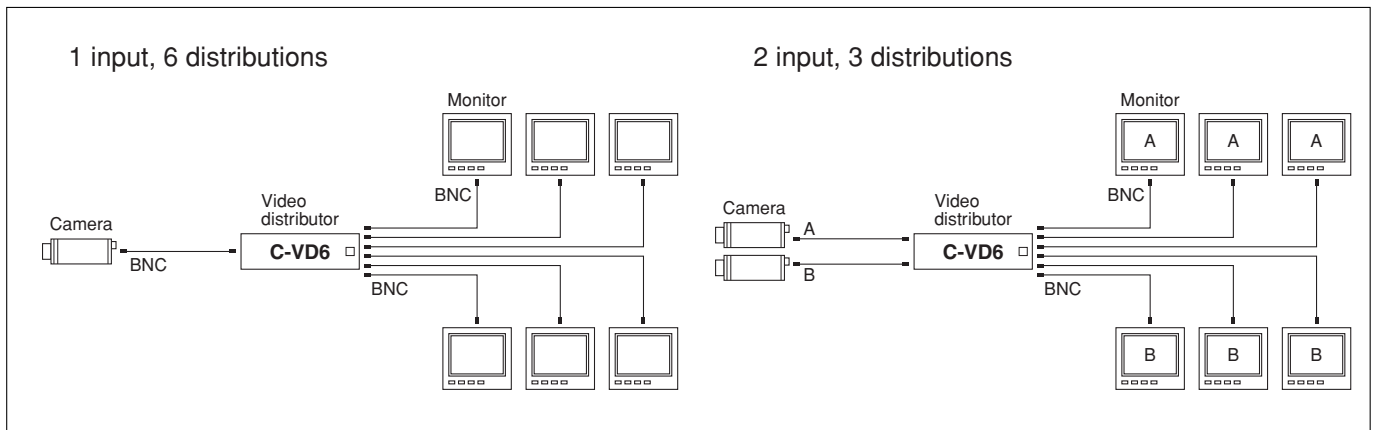

## APPEARANCE AND DIMENSIONAL DIAGRAM

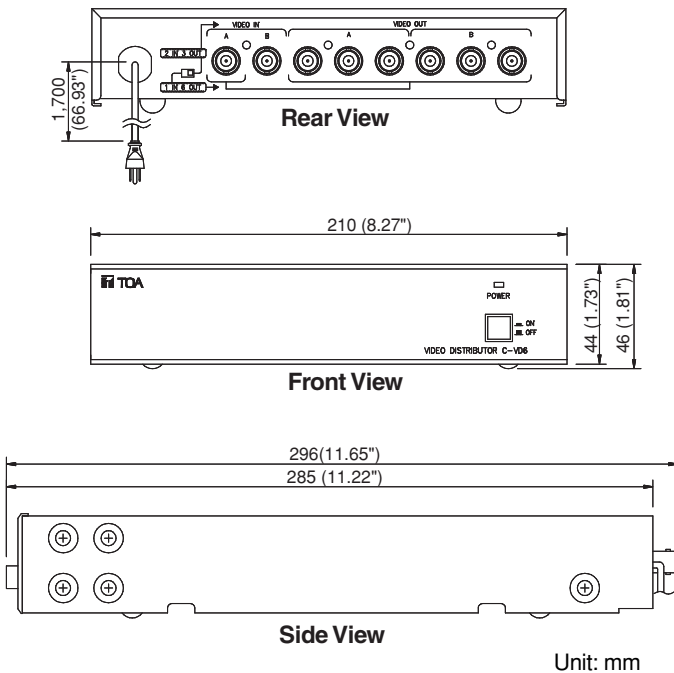

## RACK MOUNTING BRACKETS

