


■DESCRIPTION

The TOA P-60F is a multichannel power amplifier featuring high power handling capability and durability. It comes with four simultaneously-driven amplifiers, each of which provides 60 W of output (8 Ω load) or 80 W (4 Ω load). It is ideal for store sound systems or other permanent installation applications.

■SPECIFICATIONS

Power Requirement	120 VAC, 50/60 Hz
Power Consumption	670 W (4 channels, 4 Ω, rated output)
Power Output	4 channels : 60 W × 4 (8 Ω, 1 kHz) 80 W × 4 (4 Ω, 1 kHz) 2 channels : 160 W × 2 (8 Ω, 1 kHz)
Frequency Response	+0 dB, -2.0 dB (8 Ω, 20 - 20,000 Hz)
T.H.D.	4 channels : Less than 0.01 % (8 Ω, 4 Ω, 1 kHz) Less than 0.3 % (8 Ω, 4 Ω, 20 - 20,000 Hz) 2 channels : Less than 0.01 % (8 Ω, 1 kHz) Less than 0.3 % (8 Ω, 20 - 20,000 Hz)
Intermodulation Distortion	4 channels : Less than 0.03 % (60 Hz : 7 kHz = 4 : 1, 8 Ω) 2 channels : Less than 0.05 % (60 Hz : 7 kHz = 4 : 1, 8 Ω)
Input Impedance	10 kΩ (balanced)
Input Sensitivity	+4 dB (1.23 V) ±0.5 dB (8 Ω, at maximum input level)
Damping Factor	More than 50 (1 kHz, 8 Ω)
S/N Ratio	More than 110 dB (20 - 20,000 Hz) More than 115 dB (IHF-A weighted)
Finish	Front panel : Alumite, black
Dimensions	482.6 (W) × 101.4 (H) × 403.8 (D) mm
Weight	10 kg
Accessories	Rack mounting screw.....4

■APPEARANCE

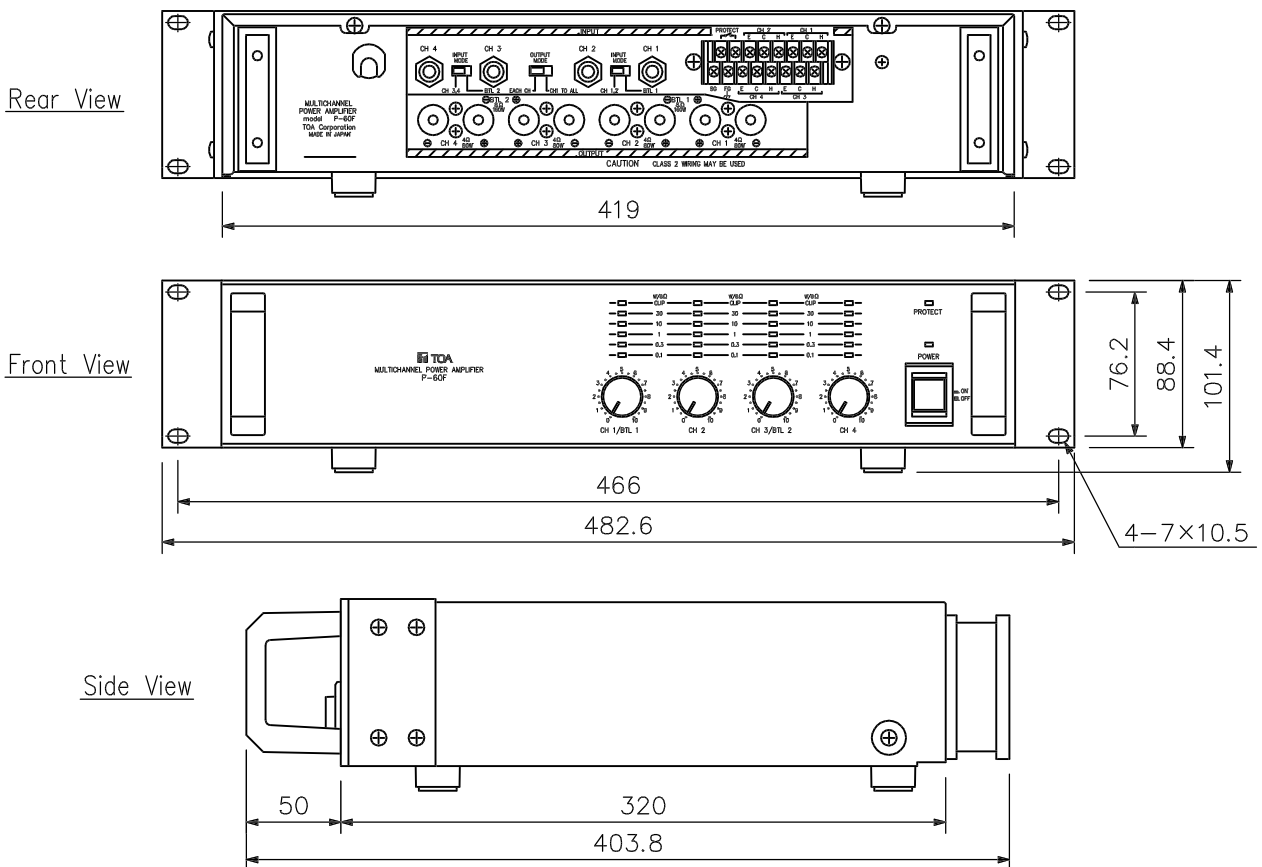

UNIT:mm SCALE:1/4