

IR-820SP Infrared Wireless Speaker	
Power Source	24 V DC (supplied from IR-802T)
Power Consumption	4.4 W (based on UL standard)
Rated Output	20 W
Frequency Response	100 Hz – 20 kHz (-10 dB) at installation in 1/2 free sound field (Measured by installing the unit in the center of a ceiling.)
Amplification System	Class D
Distortion	5 % or less (rated output)
Speaker Component	12 cm (4.72") cone-type
Infrared Wireless Receiver	
Wavelength	870 nm
Carrier Frequency	Channel A (for teacher) : 3.100 MHz Channel B (for students) : 3.350 MHz
Reception Angle	360° (Horizontal)
Connection Terminal	RJ-45
LED Indicator	Power (green) x 1
UL Code	UL60065, UL2043
Mounting Hole	ø 300 mm (11.81")
Usage Cable	CAT-5 UTP
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Operating Humidity	90% RH or less (no condensation)
Finish	Enclosure : Steel plate, plating Baffle : Fire-resistant ABS resin (resin material grade: UL94 V-0), white Punched net : Steel plate, white Filter section : Polycarbonate, optical cut filter
Dimensions	ø12.6" x 8.07" (D) (ø320 x 205 mm)
Weight	7.5 lbs (3.4 kg)
Accessories	Safety wire x 1, Ceiling reinforcement ring x 1, Trim ring x 1, Paper pattern x 1
Option	Tile bar bridge: HY-TB1

IR-802T Infrared Wireless Tuner	
Power Source	120 V CA, 50/60 Hz (se debe usar el adaptador de CA suministrado)
Power Consumption	8 W (based on UL standards) Max. 40.8 W (rated output of IR-820SP)
Rated Output	20 W
Receiving Frequency	Teacher (Channel A): 3.100 MHz Student (Channel B) : 3.350 MHz
Receiver Frequency	50 dB or more, Signal-to-noise ratio (40 dBµV input, 1 kHz modulation, ±4.8 kHz deviation)
S/N Ration	Tuner: 60 dB or more (60 dBµV input, 1 kHz modulation, ±4.8 kHz deviation, A-weighted, Equalization: Centered) AUX: 75 dB or more (A-weighted, Equalization: Centered)
Tone Squelch Frequency	32.768 kHz
Input	AUX PC: line, -10 dB*, 10 kΩ, unbalanced, stereo mini jack (internal mixing) AUX DVD/TV: line, -10 dB*, 10 kΩ, unbalanced, 2P RCA jack (internal mixing) AUX MP3: line, -10 dB*, 10 kΩ, unbalanced, stereo mini jack (internal mixing) Mute: 25 V line signals of telephone paging from a school intercom system)
Output	ALD (Assistive Listening Device): line, -10 dB*, 10 kΩ, unbalanced, monaural mini jack Speaker: RJ45 (dedicated terminal for IR-820SP connection)
Frequency Response	Tuner: 100 Hz - 12k Hz, AUX: 100 Hz - 20k Hz
Equalization	High: ±10 dB at 10 kHz/Mid: ±10 dB at 1.3 kHz/Low: ±10 dB at 100 Hz
Mute Function	Muted by 25 V line signals
LED Indicator	Power (green) x 1, Infrared reception (yellow) x 2, Mute (red) x 1
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Operating Humidity	90%RH or less (no condensation)
Finish	Panel: Aluminum, black/Case: Steel plate, black
Dimensions (W) x (H) x (D)	8.27" x 1.81" x 12.28" (210 x 46 x 312 mm)
Weight	3.97 lbs (1.80 kg)
Accessories	AC adapter(DC cord length:5.91 ft) x 1, AC power cord (6.56 ft) x 1 Volume control cover x 6, Removable terminal plug (2 pins) x 1
Option	Half-width blank panel: MB-15B-BK

	IR-310M Infrared Wireless Microphone	IR-300M Infrared Wireless Microphone	IR-200M Infrared Wireless Microphone
Batteries	One piece of IR-200BT-2 rechargeable battery for the infrared wireless microphone (option)	IR-200BT-2 rechargeable batteries for the infrared wireless microphone (option) or AA alkaline dry cell batteries (2 pieces)	
Current Consumption	typ.215 mA (1.2 V)	typ.250 mA (2.4 V, Power selector switch: N)/typ.340 mA (2.4 V, Power selector switch: H)	
Infrared Emitter			
Wavelength	870 nm (AM: Brightness modulation)		
Carrier Frequency	Channel A: 3.100 MHz/Channel B: 3.350 MHz		
Transmission Distance	50 ft (In an unobstructed space)	Approx. 65 ft (Power selector switch: H; In an unobstructed space) Approx. 50 ft (Power selector switch: N; In an unobstructed space)	
Maximum Input Sound Pressure	120 dB SPL		
Input Sensitivity Adjustment	Adjustment range: 2 levels (High, Low)	Adjustment range: -9 dB to 0 dB (factory-preset: 0 dB)	-
Microphone Unit	Unidirectional electret condenser microphone		
Frequency Response	100 Hz – 12 kHz		
Preemphasis	300 µs		
Input	External microphone input (ø3.5 monaural mini jack, phantom powered)		
Battery Operation Time	Approx. 8 hours (one piece of IR-200BT-2)	Approx. 8 hours (IR-200BT-2, Power selector switch: N) Approx. 6 hours (Alkaline batteries, Power selector switch: N)	
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)		
Operating Humidity	90 % RH or less (no condensation)	30 % to 85 %RH	
Finish	Control Section: ABS resin, white/Filter Section: Polycarbonate, optical cut filter	Control Section: ABS resin, metallic gray, paint, 50% gloss Filter Section: Polycarbonate, optical cut filter	
Dimensions	2.13" (W) x 4.29" (H) x 1.06" (D) (54.2 x 109 x 27 mm)	2.52" (W) x 3.59" (H) x 1.07" (D) (64 x 91.3 x 27.3 mm)	ø 1.46" x 9.52" (ø 37 x 241.8 mm)
Weight	0.21 lbs (95 g) (with battery and strap)	0.29 lbs (130g) (with battery and strap)	0.37 lbs (170 g) (with battery)
Accessories	Neck strap x 1	Screw driver (for setting) x 1, Color label (6 colors) x 1	

	IR-310BC Battery Charger	IR-200BC Battery Charger
Power Source	AC mains 50/60 Hz (use of the supplied AC adapter)	
Current Consumption	Max.: 2 A	
Charging Time	Max.: 3 hours	
Number of Wireless Microphones Charged Simultaneously	1 piece	2 pieces*
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)	
Operating Humidity	90 % RH or less (no condensation)	30 % to 85 % RH (no condensation)
Finish	Control section: PPE resin, white	Case: ABS resin, metallic gray, paint, 50% gloss Microphone receptacle section : PPE resin, black
Dimensions (W) x (H) x (D)	2.99" x 2.97" x 2.36" (76 x 75.5 x 60 mm)	9.37" x 4.31" x 3.86" (238 x 109.5 x 98 mm)
Weight	0.23 lbs (105 g)	1.4 lbs (635 g) (unit only, including mounting adapter(accessory))
Accessories	AC adapter x 1, Power cord x 1	AC adapter (DC cord length: 5.91 ft) x 1, Power cord (6.56 ft) x 1, Mounting adapter (preinstalled) x 2

IR-801AF Audio Interface Unit	
Power Source	24 V DC (supplied from IR-802T)
Infrared Frequency Channel	Channel A: 3100 MHz
Contact Output	Relay contact output, contact capacity: 30 V DC/ 2 - 500 mA, removable terminal block
Audio Output	-20 dB*, electrically-balanced, removable terminal block (3 pins)
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Operating Humidity	90% RH or less (no condensation)
Finish	Control section: ABS resin, Black
Dimensions (W) x (H) x (D)	8.27" x 2.73" x 7.13" (210 x 44 x 181 mm)
Weight	1.23 lbs (560 g)
Accessories	Removable terminal block (2 pins) x 1 Removable terminal block (3 pins) x 1

\*Use of the mounting adapter allows one the IR-200M and one IR-300M to be charged in combination

TOA Canada Corporation  
Tel: 1-800-263-7369  
Fax: 1-800-463-3569  
sales@toacanada.com  
www.TOAcana.com

Specifications are subject to change without notice.



# Infrared Wireless Classroom System



Enrich Your Students' Learning Experience  
with Remarkably Clear, Easily Audible  
Classroom Communication.

# TOA's educational microphone system offers wireless convenience and clear, interference-free infrared voice transmission that brings classrooms to life.




Assembled specifically for classroom use, TOA's new Infrared Wireless Classroom System includes a ceiling-mounted wide-dispersion speaker (with integrated receiver and amplifier), an easily accessed desktop tuner and a pair of lightweight IR wireless microphones, one each for the teacher and students.

The system is tailored to classroom size, moreover, thus avoiding unnecessary equipment installation. The wide-dispersion speaker provides ample 30 ft x 30 ft coverage, transmitting teachers' and students' normal speaking voices to everyone in the room, from front to back, with equal clarity and TOA's renowned superior sound quality. The resulting easy interactive communication stimulates students and improves their understanding of the course content.

## TOA innovative all-in-one solution - simple and easy

- Uniform classroom-wide sound quality with single wide-dispersion speaker
- Minimized system components (tuner, 2 microphones and integrated speaker)
- Quick, easy installation requiring just one CAT-5 cable.
- Selection of three TOA lightweight, low-fatigue IR wireless microphones
- System expandable with optional interface unit for external device control and paging operations

### TOA IR Classroom System - Simple and easy

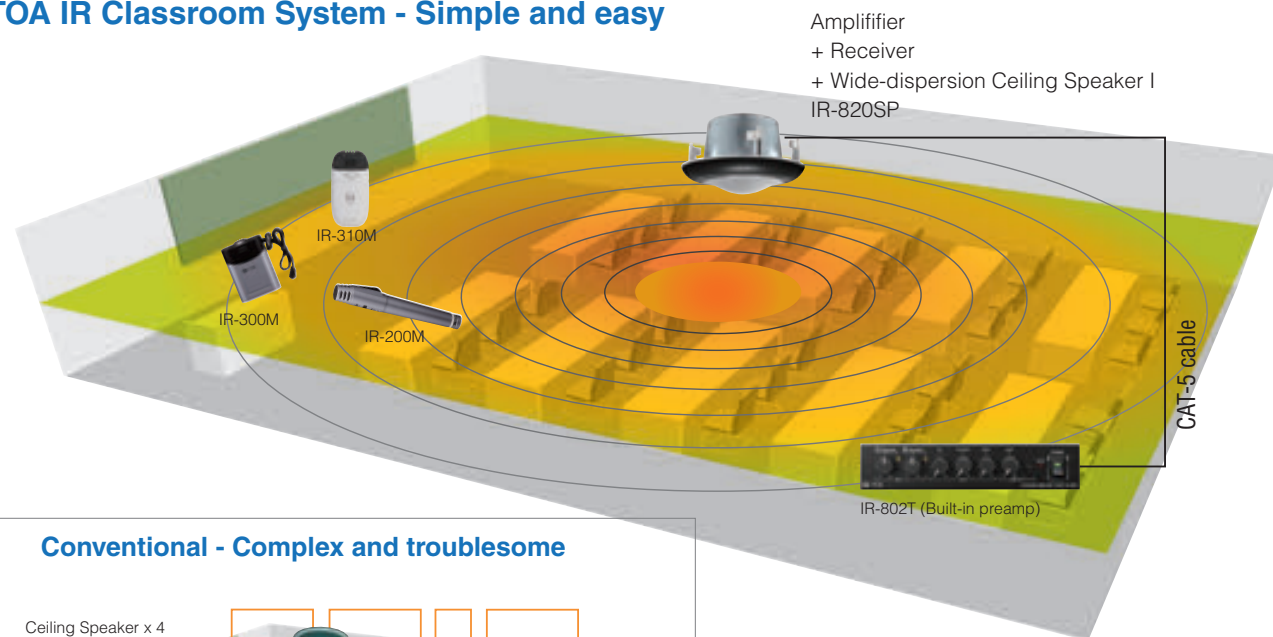

#### IR-820SP Infrared Wireless Speaker



- Built-in infrared receiver and 20W digital amplifier
- Unique wide-dispersion acoustic structure employing innovative TOA technology to achieve uniform output over a wide radius
- Bass-reflex speaker system achieving a wide frequency range and high power-handling capability
- Easy installation with quick, optimally positioned ceiling mounting

#### IR-802T Infrared Wireless Tuner



- 3 AUX inputs for PC, TV/DVD player and MP3 audio player
- Output muting by 25 V line signal from telephone paging
- Equalizer control knobs for low-, mid- and high-frequency outputs
- Mixing output terminal for ALD (Assistive Listening Device)
- Frequency response optimized to reduce acoustic feedback in 30 ft x 30 ft classrooms

#### IR-310M Infrared Wireless Microphone (for Teacher/Student)



- Usable as hands-free or hand-held microphone
- Lightweight body with unobtrusive styling
- 8-hour operation with single AA battery
- Function button for use in paging or external device control via IR-801AF
- Microphone sensitivity adjustable to suit application
- Sturdy clothing clip to prevent wobbling or rotation during hands-free use

#### IR-200M Infrared Wireless Microphone (for Student)



- Designed for stable voice transmission, with 2 infrared emitters positioned on the body to avoid accidental interference by a hand holding the microphone
- 2-level adjustable infrared light emission intensity
- Lightweight body keeps hands from tiring, even during long hours of use (0.37 lb with 2 alkaline batteries).
- Antibacterial treatment

#### IR-310BC Battery Charger (para IR-310M)



- Dedicated battery charger for IR-310M
- Anti-overcharging design


#### IR-300M Infrared Wireless Microphone (for Teacher)



- Easy-to-wear, neck-suspension design permitting immediate use
- 2-level adjustable infrared light emission intensity
- Lightweight body can be worn for long periods of time without causing fatigue (0.29 lb with 2 alkaline batteries)
- Usable as transmitter for external microphone
- Antibacterial treatment

#### Optional External Microphones (for IR-310M/300M)

##### YP-M101 Tie-clip Microphone



##### YP-M301 Headset Microphone



#### IR-200BC Battery Charger (for IR-200M/300M)




- Rapid-charging function permitting simultaneous charging of 2 infrared microphones within 3 hours (max.)

#### IR-200BT-2 Ni-MH Batteries Ni-MH AA rechargeable batteries for Infrared Wireless Microphones.




#### IR-801AF Audio Interface Unit



- Interface unit enabling paging and control of external devices with IR-310M's function button
- Installation between IR-820SP and IR-802T with CAT-5 cable

### Conventional - Complex and troublesome

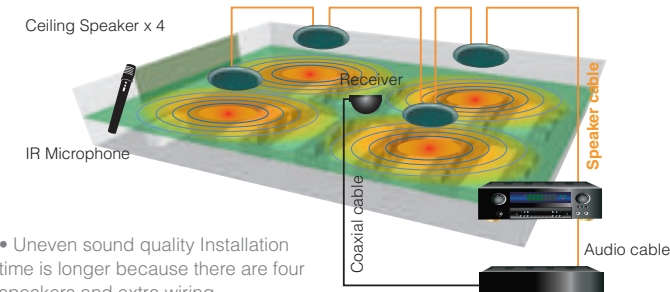

- Uneven sound quality Installation time is longer because there are four speakers and extra wiring.

- Uniform sound quality throughout the classroom through one speaker Quick and easy installation using one CAT-5 cable.