

## PJ-64

### PROJECTION SPEAKER 6W



The PJ-64 is a projection speaker designed for ceiling and wall installations. Considered in architectural design, it can blend in with lighting equipment. The supplied swivel bracket allows for flexible speaker angle adjustment. The PJ-64 is driven on high-impedance (100 V and 70 V) line. The input power (impedance) can be easily changed at the upper side of the speaker. The speaker is easy to repaint so as to meet a wide range of design needs.


### Key features

- Stylish and outstanding design inspired by the finest lighting fixtures
- Flexible speaker direction adjustment with accessory brackets
- Repaintable
- Input impedance easily changeable
- Bass-reflex type

## Specifications

Enclosure	Bass-reflex type
Rated Input	6 W (100 V line), 3 W (70 V line)
Rated Impedance	100 V line: 1.7 k $\Omega$ (6 W), 3.3 k $\Omega$ (3 W), 10 k $\Omega$ (1 W) 70 V line: 1.7 k $\Omega$ (3 W), 3.3 k $\Omega$ (1.5 W), 10 k $\Omega$ (0.5 W)
Sensitivity	90 dB (1 W, 1 m) (500 - 5,000 Hz, pink noise)
Frequency Response	100 - 18,000 Hz (peak -20 dB)
Speaker Component	12 cm (5) cone-type
Speaker Cable	2-core cabtyre cord 60 cm (1.97 ft) with diameter of 6 mm (0.24)
Finish	Enclosure: HIPS resin, off-white (RAL 9010 or equivalent color) Grille: Surface-treated steel plate net, off-white (RAL 9010 or equivalent color), paint
Dimensions	#186 x 369 (H) mm (#7.32 x 14.33")
Weight	1.5 kg (3.31 lb) (unit only)
Included Accessories	Swivel bracket ...1, Speaker mounting screw (4 x 16) ...3

## Dimensions

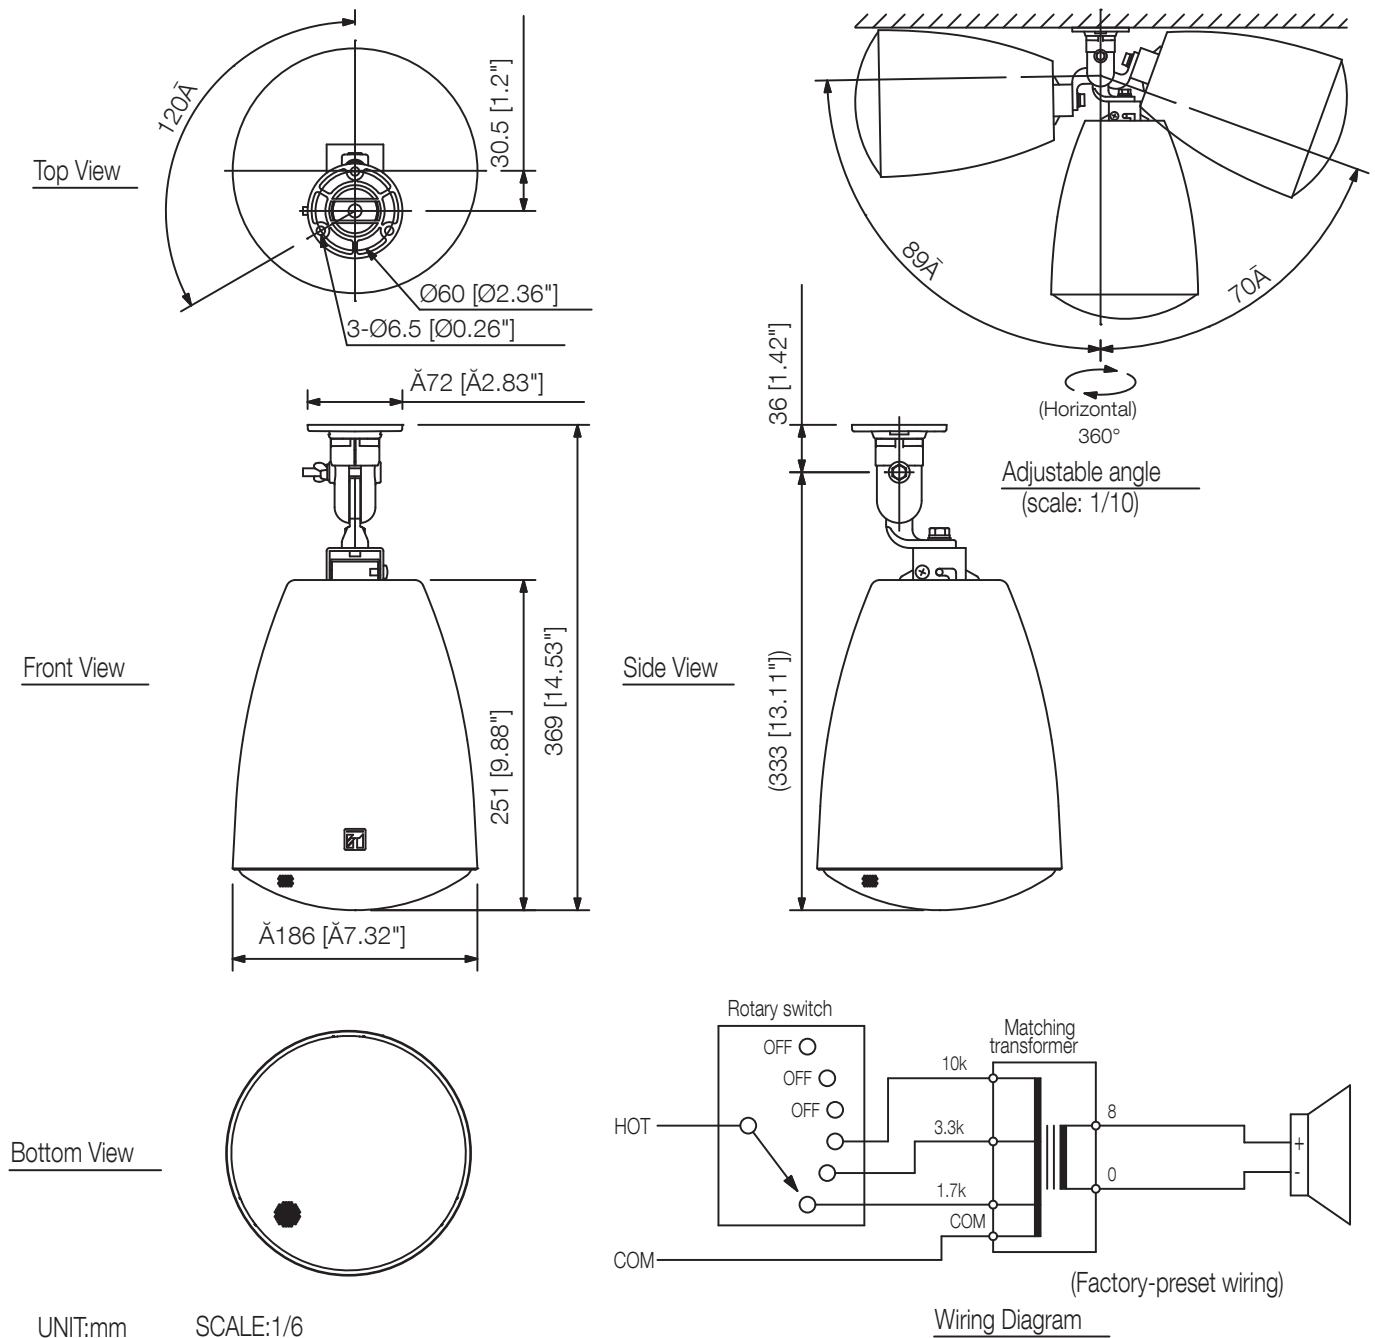

## A&E specifications

The speaker shall be a bass-reflex 5" (12cm) cone type suitable for ceiling and wall mounting. Input impedance shall be easily adjustable with rotary switch on the upper side of the speaker. The speaker shall include a transformer having multiple taps (1W, 3W, 6W at 100V and 0.5W, 1.5W, 3W at 70V) adjustable. The output sound pressure level at a distance of 1m with a 1W input level applied shall be 90 dB SPL. The speaker shall have a frequency response of 100 – 18,000Hz (-20dB). The speaker enclosure shall be constructed of HIPS resin. The grille shall be constructed of surface-treated steel plate net. The speaker shall be available in off-white color, and shall be easily repaintable. The unit shall have dimensions of ø186 x 369 (H) mm (ø 7.32" x 14.33"), and a weight of 1.5 kg (3.31 lbs.). The speaker shall be a TOA model PJ-64