

S5.3-BTX-H2 Q

S5.3 BELTPACK



The S5.3-BTX is a wireless transmitter. This features user-friendly operability, and employ an easy-to-read LCD display. Also, it is possible to perform the system settings through infrared communications.


Key features

- Credit card size beltpack
- Simple programming of transmitter with built-in Infrared data link
- Frequency & Power lock facility
- Clear and intuitive LCD display
- Single AA operation of transmitters with battery life of over 10 hours
- Detachable antenna
- Professional metal enclosure

Specifications

Selectable Channel	9 banks, 12 frequencies max/bank
Modulation	Frequency Modulation
RF Carrier Power	50 mW or less
Tone Frequency	32.768 kHz
Modulation Type	PLL synthesized
Maximum Input Level	120 dB SPL (microphone sensitivity: Gain "0")
Audio Input Connector	TA-4 (Mini-XLR 4 pins)
Maximum Deviation	+/-40 kHz
Audio Frequency Response	60 Hz - 20 kHz
Dynamic Range	110 dB or more (with S5.3-RX)
Battery	LR6 (AA)
Battery Life	10 hours (alkaline)
Indicator	LCD display, power lamp
Antenna	1/4 # mono-pole type
Function	Infra-Red ink port, Battery life indicator (4 steps), Microphone sensitivity adjustment (Gain 0 -9; 20 dB)
Operating Temperature	-10 °C to + 50 °C (14 °F to 122 °F)
Finish	Silver
Dimensions	55(W) x 80(H) x 22(D) mm (2.17" x 3.15" x 0.87")
Weight	140 g (0.31 lb) (with battery)
Included Accessories	Belt clip x 1

Dimensions

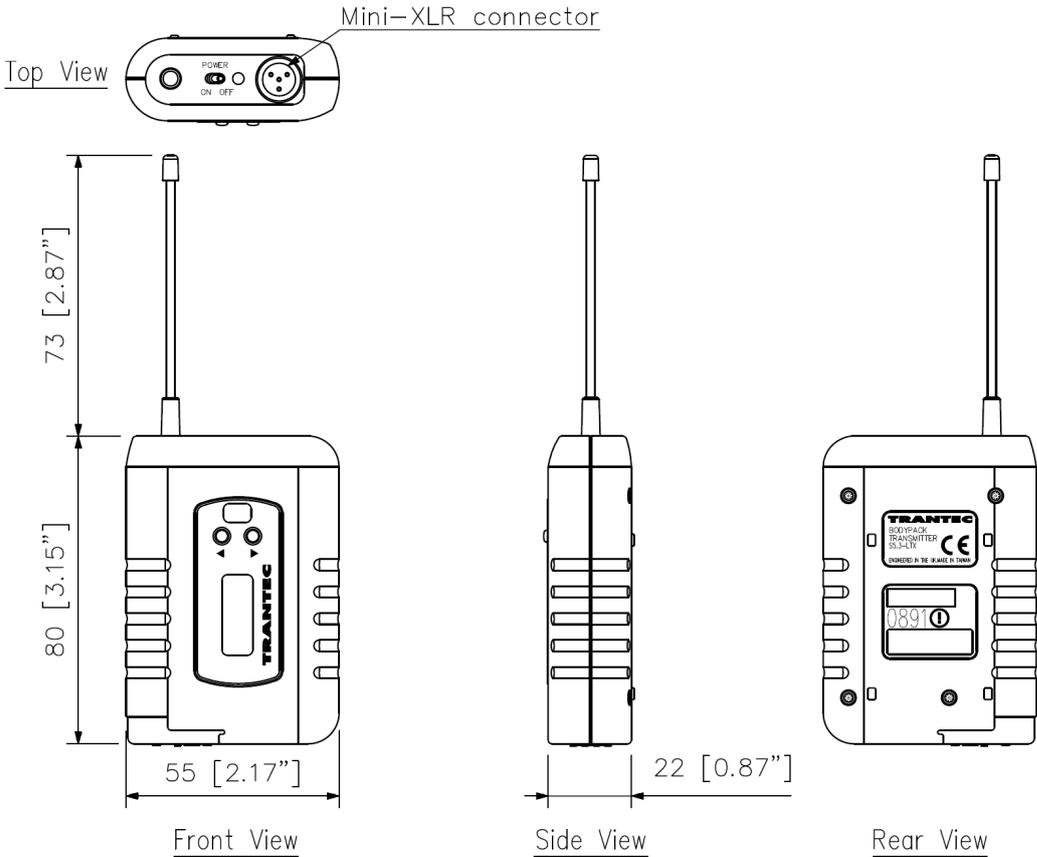

UNIT: mm