

DESCRIPTION

The D-961SP is a Stereo 2-channel line digital output module designed for use with the D-901 Digital Mixer, etc. With the use of this module, digital signals can be output, permitting direct connection of the D-901 Digital Mixer to equipment having a digital input. Each pair of optical output and coaxial output is output in parallel.


SPECIFICATIONS

| | |
|--------------------|--|
| Output: | Stereo 2 channel line (with splitter, can be output to each pair of optical output and coaxial output in Parallel), 0.5 V (p-p) 75 Ω, Coaxial RCA jack × 2, Square optical connector × 2 |
| Applicable Format | S/PDIF (2 channel multiplexed) |
| Sampling Frequency | 48 kHz |
| Finish | Panel: Pre-coated steel plate, black, 30% gloss |
| Dimensions | 35 (W) × 119.5 (H) × 178.4 (D) mm |
| Weight | 130 g |


APPEARANCE



Top View

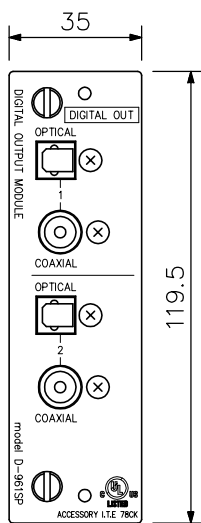

Front View

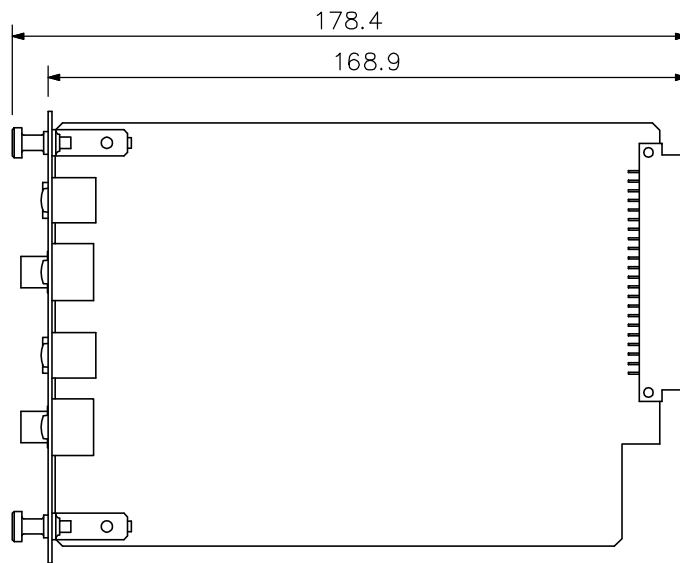

Side View

UNIT:mm SCALE:1/2