
TOA CCTV SYSTEMS

MANUAL SWITCHERS

CC-3011B CC-3021B



DESCRIPTION

The TOA CC-3011B and CC-3021B manual switchers can switch six or twelve camera inputs respectively to a single output. Switches are the mechanical lock type. They can also be mounted on a rack cabinet by using an optional bracket.

FEATURES




1. Six (CC-3011B) or twelve (CC-3021B) camera inputs can be switched to a single output.
2. Reliable, easy-to-use mechanical lock type switches.
3. Can be mounted on standard rack cabinet with optional mounting bracket.
4. Compact design.
5. Decor-enhancing panel and case.

SPECIFICATION




Model	CC-3011B/ CC-3021B
Video input	Up to 6 (CC-3011B) Up to 12 (CC-3021B) VBS 1.0 V _{p-p} / 75 Ω (BNC)
Video output	VBS 1.0 V _{p-p} / 75 Ω (BNC) 1 input
Switches	Mechanical Lock type
Dimensions (W x H x D)	210 x 47 x 248 mm
Weight	1.4 kg
Finish	Black (mat)
Optional accessory	Rack mounting bracket : MB-15B-BK, MB-15B-J

APPEARANCE AND DIMENSIONAL DIAGRAMS

CC-3011B

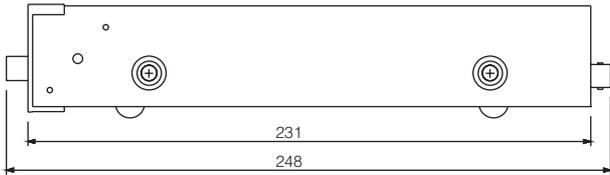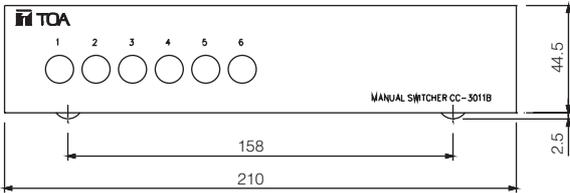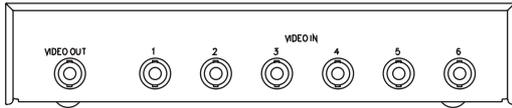


CC-3021B

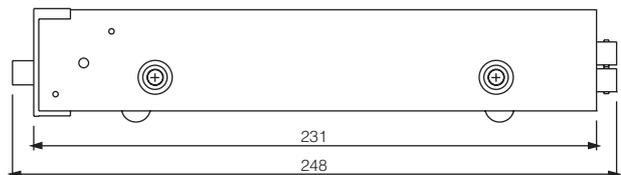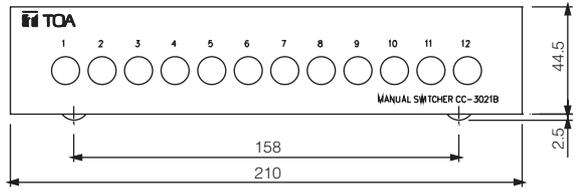

Unit: mm

RACK MOUNTING BRACKETS

MB-15B-BK

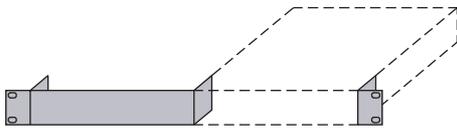

MB-15B-J

